

HF 13.56 MHz Portable Reader

Product Code: LR-202

DESCRIPTION


The LR-202 is a high-performance 13.56 MHz RF Portable Reader, designed to provide high-speed scanning and communications with RFID tag. The reader is ideal for use in for library inventory management and logistic applications.

FEATURES

- High Speed
- Support both standard and fast mode
- Anti-collision capability

TAG SUPPORTED

- ISO 15693
- iCode I

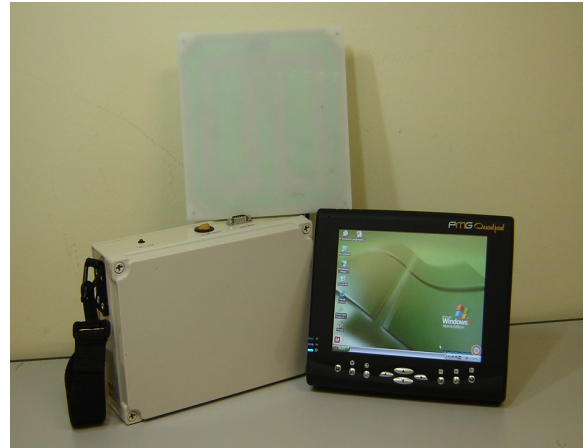

SPECIFICATIONS

	RFID Reader	RFID Antenna
Performance Characteristics		
Frequency:	HF, 13.56 MHz	HF, 13.56 MHz
Supported Transponders:	ISO 15693, iCode I	-
Communications:	RS232 serial interface, up to 115.2 kbps	-
RF Output Power:	1 Watt	-
Read Range:	20 cm (depending on tag size / material)	-
Impedance:	50 ohm	50 ohm
RF Connection:	BNC Connector	BNC Connector
Physical Characteristics		
Dimensions (L x W x D):	300 x 125 x 255 mm	300 X 125 X 225 mm
Weight:	3000 gram approximate	300 gram approximate
Environment		
Operating Temperature:	0 °C to +60 °C	0 °C to +60 °C
Storage Temperature:	-20 °C to +65 °C	-20 °C to +65 °C
Relative Humidity:	5% - 90%, non-condensing	5% - 90%, non-condensing

*In a continuing effort to improve our products, Tunity Technologies reserves the right to change specifications and features without prior notice.